

Doncaster Cables

550 SPEAKER CABLE **12/0.2mm COPPER / FIGURE 8 PVC INSULATED**





Sales Office: Millfield Industrial Estate, Arksey Lane, Bentley, Doncaster, South Yorkshire, DN5 0SJ

Tel: 01302 821700

Fax: 01302 821701

Email: sales@doncastercables.com

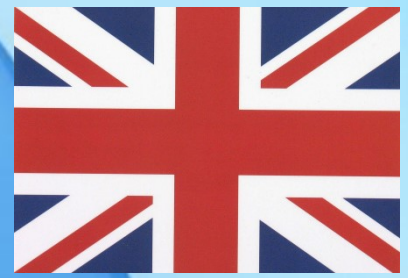

Doncaster Cables

550 SPEAKER CABLE 12/0.2mm COPPER / FIGURE 8 PVC INSULATED


12 strands of 0.2mm plain annealed copper. The conductors are constructed in a flat 'figure of 8' configuration. The insulation is black/white in colour.

Designed for use in connecting loudspeakers to audio appliances and amplifiers.




The general rule of speaker cable is the more strands that the cable has, the better the sound quality. Including higher definition, a richer bass and more musical highs

Conductor : Plain Annealed Copper Class 5 Flexible to BS EN 60228

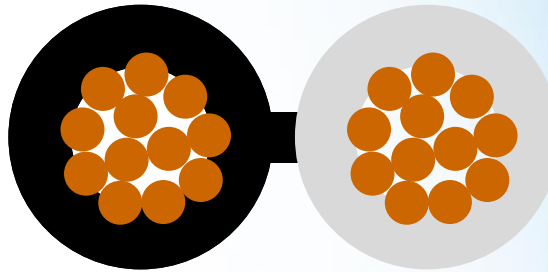Insulation: PVC Type T12 to BS EN 50363-3



Reference Number	Nominal Cross Sectional Area of Conductor (mm ²)	Nominal Stranding of Conductor (mm)	Nominal Radial Thickness of insulation (mm)	Approx. Height (Minor Axis) (mm)	Approx. Width (Major Axis) (mm)	Approx. Web Details (mm)	Approx. Weight (kg/km)
550	0.40	12/0.2	0.5	1.8	3.8	0.3x0.2	16

MINIMUM OPERATING TEMPERATURE 	MAXIMUM OPERATING TEMPERATURE 	MINIMUM BENDING RADIUS 
---	---	--